



AUTOMATIC FLUSH PLATE FOR WALL HUNG SOLUTION

Can be installed on **INGENIO**

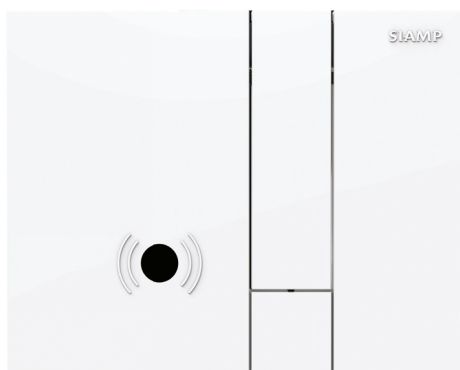

ABS white
Ref. : 10 0006 51

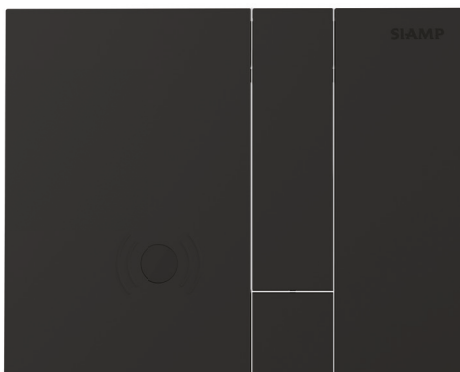

ABS black
Ref. : 10 0006 50



ABS bright chrome
Ref. : 10 0006 52



A greater hygiene and comfort
with the contactless flush solutions

- Hygiene
- Flushing efficiency
- Water saving
- Design

USE


- Low audience public places
- Offices

FEATURES

- Presence sensor, cycle starting after 15 seconds
- Small flush when presence is between 15 sec. and 2 minutes
- Large flush when presence is more than 2 minutes
- Forced flush (hand presence in between 2 and 5 sec. in front of sensor)
- Cleaning/Maintenance mode
(lasts 5 min, hand presence more than 8 sec. in front of sensor)
- Self-diagnosis
- To be connected to mains (supplied with transformer)
- Lock
- Cladding thickness in between 16 and 80 mm

AUTOMATIC FLUSH PLATE FOR WALL HUNG SOLUTION

Can be installed on **INGENIO**

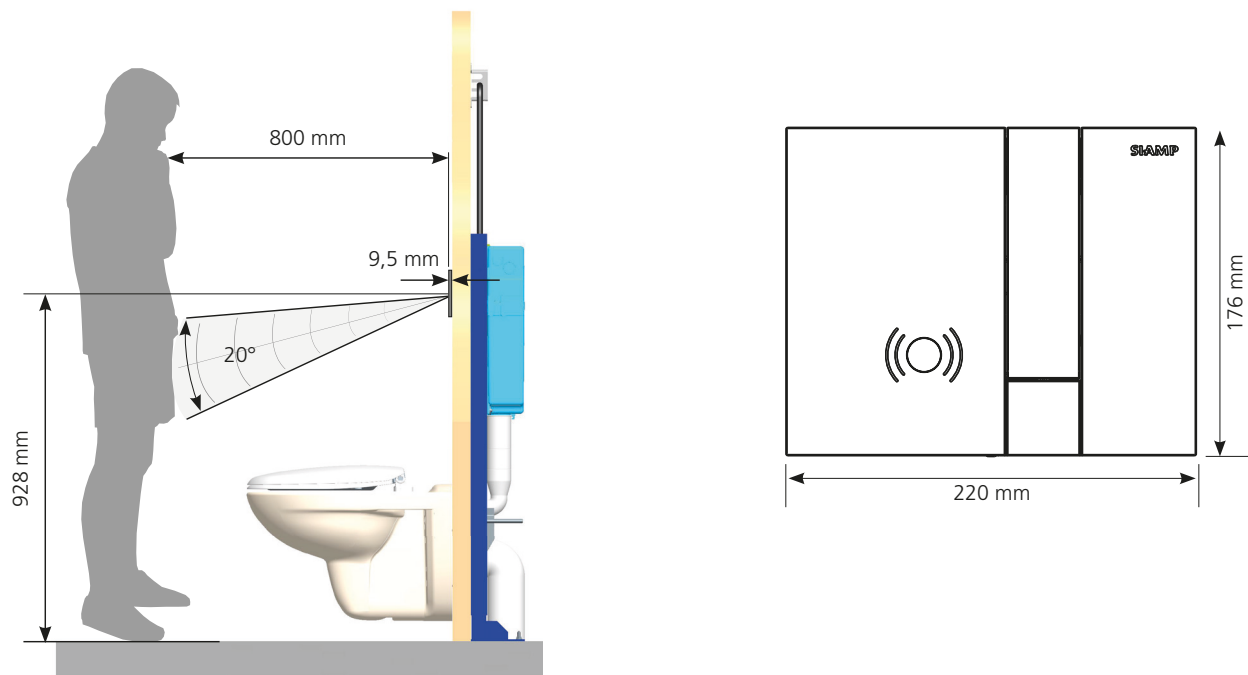

TEXT FOR TENDERS

AUTOMATIC FLUSH PLATE - INGENIO - ABS
Ref. : 10 0006 5X

ABS double flush control plate, incorporating an infrared sensor automatic flush actuation system with mechanical servomotor featuring water saving. Mechanical backup. Width 230 mm, height 174 mm, depth 12.5 mm. Supplied with: ABS control plate, chassis, 2 fixing screws, actuating screw, actuator counterplate, wired transformer, IP54 flush-mounting box, protective sheath, M4x12 antivandal screw lock.

	Reference	Gencod	Packing	Packing			Box quantity
				Nb	L. x d. x h. (mm)	Weight	
Automatic flush plate - Ingenio - ABS - White	10 0006 51	3 24723 010563 2	Box	1	324 x 314 x 237	2,3	1
Automatic flush plate - Ingenio - ABS - Black	10 0006 50	3 24723 010562 5	Box	1	324 x 314 x 237	2,3	1
Automatic flush plate - Ingenio - ABS - Bright chrome	10 0006 52	3 24723 010564 9	Box	1	324 x 314 x 237	2,3	1