


2 EN1

Universal hydraulic inlet valve

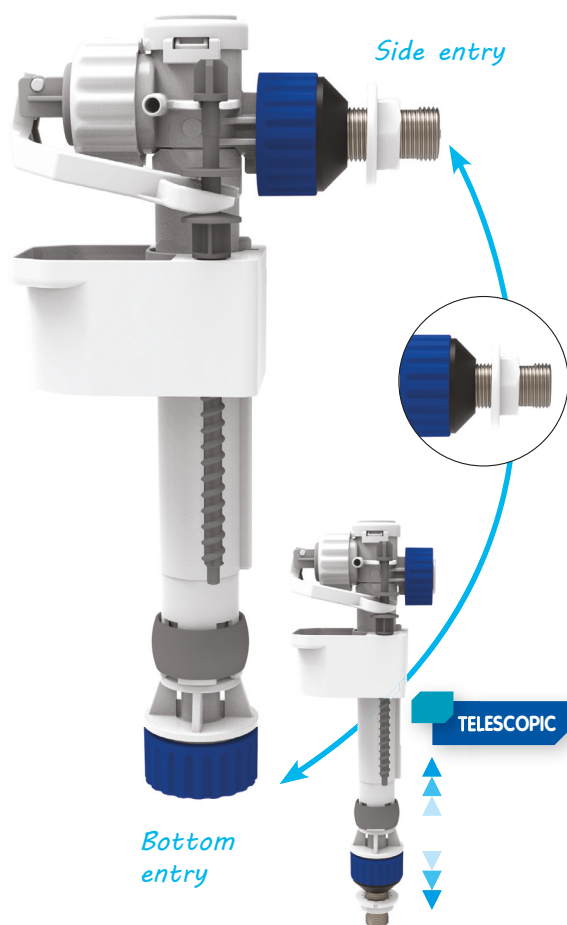

USE


Whatever the water entry (side or bottom) on the cistern, this inlet valve can be quickly fitted thanks to its removable insert connexion

FEATURES

- **For side or bottom entry**
- **Compact**
- To be installed into ceramic or plastic, recessed or at sight cisterns, for replacement or as original equipment
- **Hydraulic closure**
- Telescopic : to fit with any tank heights (bottom version), to reduce fitting noise (side version)
- Adjustable water level : setting range 80 mm
- **Silent**
- **Anti-backflow function**
- Removable connection insert available in 4 types : 1/2 or 3/8 brass, 1/2 or 3/8 plastic
- **Quick fitting**
- **Flow rate**: 8l/min at 3 bars and 3.6l/min at 0.5 bars
- **Pressure function range**: from 0.5 to 10 bars (allows pressure peak at 16 bars)

1/2 and
3/8 brass

1/2 and
3/8 plastic

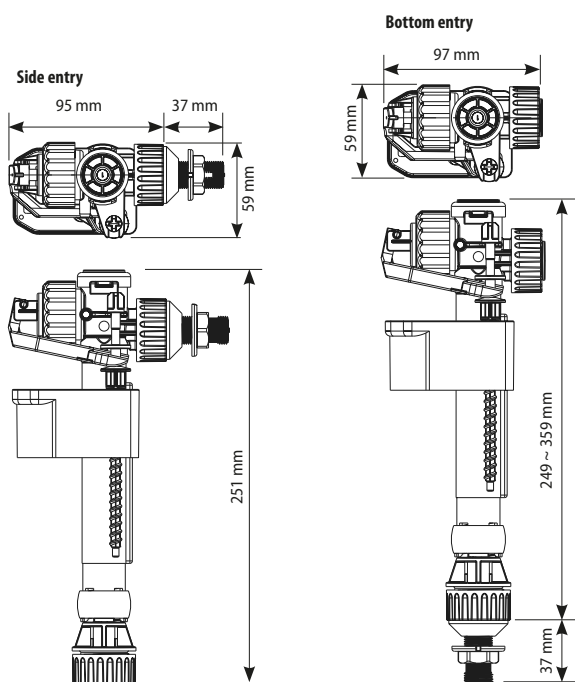

	Reference	Packing	Packing Nb	Packing Kg	Pallet quantity
2 en 1	10 0060 11	Boîte	18	6,50	-