



INTRASLIM The all-terrain concealed cistern

INTRASLIM THE ALL-TERRAIN CONCEALED CISTERN

INTRASLIM FULL FRAME INSTRASLIM FULL FRAME VERY LOW DEPTH INTRASLIM + SCB 350 Wall Hung Wall Hung Wall Hung **Light Wall Light Wall Light Wall**

SIAMP presents INTRASLIM, the optimized and universal solution for the toilets. Concealing the cistern brings modernity and lightens your WC room.

A WIDE RANGE OF FLUSH PLATE

Choose the material, the colour, the surface and the design to match your bathroom's decoration.

2 FLUSHING TECHNOLOGIES

• Mechanical actuation: the most popular actuation solution on the market ensuring simplicity and efficiency.

• Pneumatic actuation: offset for disminished people use or for respecting the fire safety regulation, it offers a great flexibility of installation position.

VERSATILE

INTRASLIM concealed cisterns can be coupled with back to wall or wall hung bowls. Robusts, our structures resist to a 400 kg load. Cisterns can be fixed bricklaying or attached to a supporting wall with a light cladding as plasterboards. They can be flipped to offer a back access to inner active components when installed into a dry riser.

CE

CONFIDENCE

100% of SIAMP's expertise is at the heart of Intraslim. As a world flushing technology specialist, SIAMP provides a high performance concealed cistern in terms of flush efficiency and reliability. INTRASLIM complies with $\mathbf{C} \in \mathbf{C}$


INTRASLIM THE ALL-TERRAIN CONCEALED CISTERN



INSTALLATION VERSATILITY & FLUSH PERFORMANCE

1	cistern	19	flush plates designs
2	flush activation types		
6	installation possibilities	59	flush plates options
9	fixation kinds	90	mm thick

INTRASLIM BACK TO WALL - WET WALL

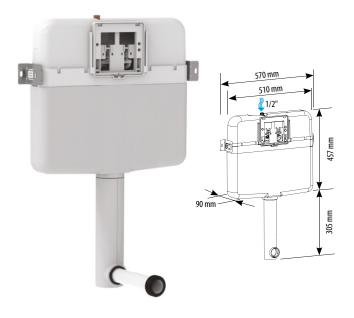



INTRASLIM

Slim 90 mm


- Concealed wet wall installation
- Insulated to prevent condensation
- Double flush front plates or remote pneumatic buttons
- Adjustable, mechanical or pneumatic, outlet valve
- Adjustable compact 95L quiet fill valve
- Stop valve
- 1/2" M outer water connexion
- Reversible cistern (remote pneumatic)







WALL HUNG SANITARY STANDARD HEIGHT - WET WALL

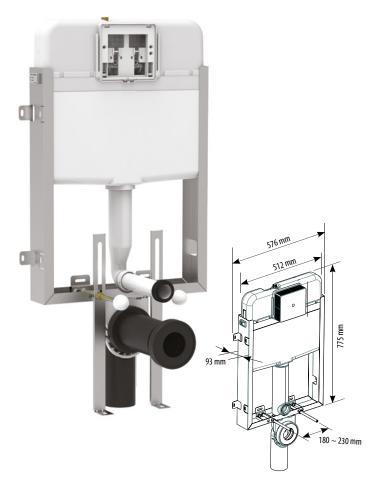



INTRASLIM HALF FRAME

Fits into 90 mm thick blocks

- Wall fixing structure load bearing to 400kg
- Optional feet
- Concealed wet wall installation
- Insulated to prevent condensation
- Double flush front commands or remote pneumatic buttons
- Adjustable mechanical or pneumatic outlet valve
- Compact 95L inlet valve
- Brass stop valve

Optional 90° drain connection kit :

- HDPE Ø 90 mm male
- HDPE Ø 100 mm male
- HDPE Ø 110 mm male
- PVC Ø 100 mm male

OFFSET COMMAND FOR DISMINISHED PEOPLE : separated SKU or mechanical SKU can be converted to pneumatic actuation



INTRASLIM WET/LIGHT WALL + SCB 350 Slim 90 mm

Self-supporting

INTRASLIM WET/LIGHT WALL

- Concealed wet wall installation
- Double flush front commands or remote pneumatic buttons
- Adjustable mechanical or pneumatic outlet valve
- Adjustable noiseless float valve

SCB 350

- Self-supporting structure load bearing to 400kg
- Accepts flush supply sleeves from Ø30 to Ø50mm
- Accepts WC drain connections from Ø90 to Ø120mm





WALL HUNG SANITARYWARE STANDARD HEIGHT - LIGHT WALL

WALL INTRASLIM LOW DEPTH

Supporting wall fixation





WALL INTRASLIM FULL FRAME Slim for narrow depth installation

- Concealed DRY or WET wall installation
- Structure load bearing to 400kg
- Insulated to prevent condensation

180 230 mm

- Double flush front commands or remote pneumatic buttons
- Adjustable, mechanical or pneumatic, outlet valve
- Compact 95L inlet valve
- Brass stop valve

572 mm


- Optional 90° drain connection kit :
- HDPE Ø 90 mm male
- HDPE Ø 100 mm male
- HDPE Ø 110 mm male
- PVC Ø 100 mm male

WALL INTRASLIM VERY LOW DEPTH Supporting wall fixation




1112 ~ 1212 mm

Fits into a 90 mm block



OFFSET COMMAND FOR DISMINISHED PEOPLE : separated SKU or mechanical SKU can be converted to pneumatic actuation

A UNIQUE RANGE OF FLUSH PLATE

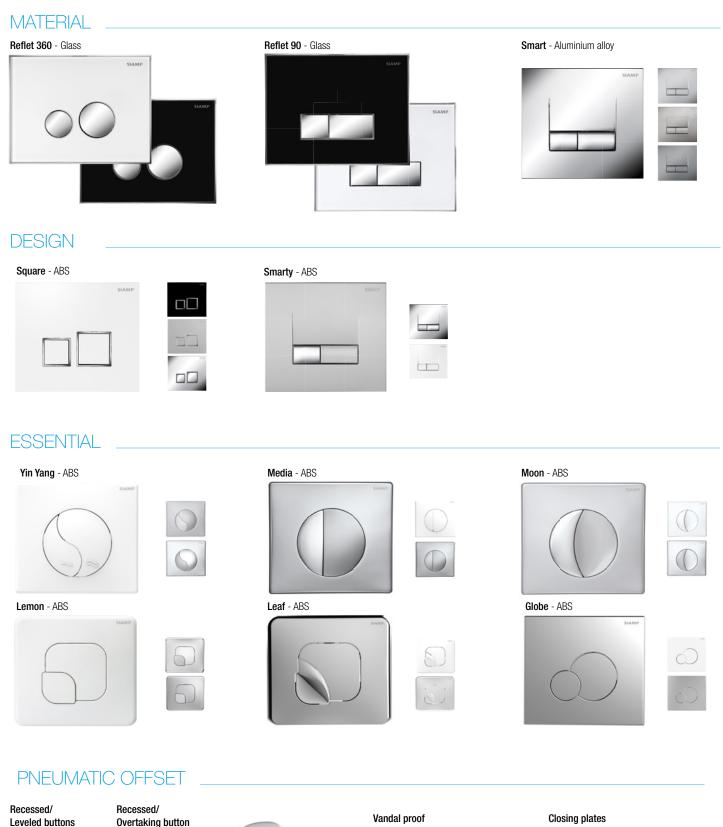







Vandal proof

_



Closing plates



SIAMP

4, quai Antoine 1^{er} / B.P. 219 MC 98007 MONACO Cedex Tél. : +377 93 15 53 75 Fax : +377 92 05 71 04 contact@siamp.com www.siamp.com