



WATER MINDED

Export catalogue 2024

Designed to replace the original cistern for a floor standing WC, our range of plastic exposed cisterns answer to all types of installation.

With their ceramic appearance, they are also simple to install and fit with quiet inlet valves for comfort.

Simple to install and fitted with quiet inlet valves for comfort. In compliance with **EN 14055**, our cisterns have been conceived to be compatible with bowls complying with EN 997.

Exposed Cisterns

**EXPOSED CISTERNS**

62 / 69

Low Level Installation	64
Tosca SF/DF	65
Riviera SF	66
Riviera DF	66
High Level Installation	67
Primo 08	67
Rondo H pneumatic SF	67
Rondo H pneumatic DF	67
Close-Coupled Installation	68
Primo 58	68
Rondo Comfort SF	68
Rondo Comfort DF	69
Scala Comfort	69
Scala Comfort Plus	69

ACCESSORIES

70

PACKAGING INFORMATION

71

CODES INFORMATION

71

WHICH TYPE OF INSTALLATION?



Close-Coupled

- Fixation directly on the bowl



Low Level

- Fixation on the wall above the bowl
- To put above short bowls



High Level

- Upright fixation on the wall
- Equipment out of the reach of the user
- Powerful flush

WHICH FEATURES?

Water Saving

- **Dual flush**
- **Start & Stop**
- Inlet valve with **delayed action**



Quiet Fill

- All of our cisterns are fitted with a **quiet fill inlet valve**



10 dB


Insulated Cistern

- Inner PSE
- To **prevent condensation**





Reinforced Fixation

- An **adjustable rear support** and a **stabiliser** are available in our close-coupled cisterns for a better holding and to avoid pivoting effects

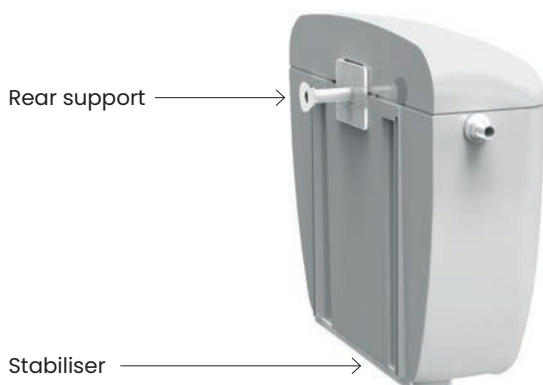

Adaptability

- A **universal water supply set** to allow all kinds of supply connection (side, bottom)



- A **low level transformation set** to switch from a close-coupled to a low level cistern




- A **High level transformation set** to switch from a close-coupled to a high level cistern

EXPOSED CISTERNS LOW LEVEL



Tosca SF/DF

NEW

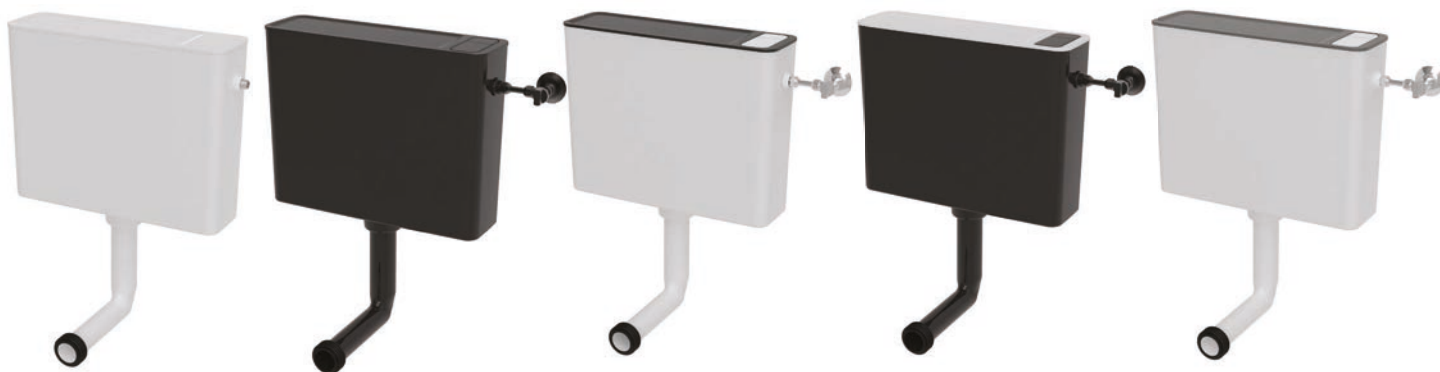


LOW LEVEL INSTALLATION

AVAILABLE IN SINGLE FLUSH  OR DUAL FLUSH


• Modern design

- **Single flush**  function or dual flush top pad command
- Single or double flush outlet valve, 6L factory preset
- **Side or bottom fill valve**, 6L factory preset
- Cistern and lid made from PS
- Cistern maximum water volume capacity 7,5L with PSE insulation
- **Bottom, left, right or inner center water connection**
- Wall angle top valve 1/2M, pipe for inlet valve connection, chrome plated
- **Height adjustable supply bent pipe**
- Wall fixing accessories

3/8" Side-entry version

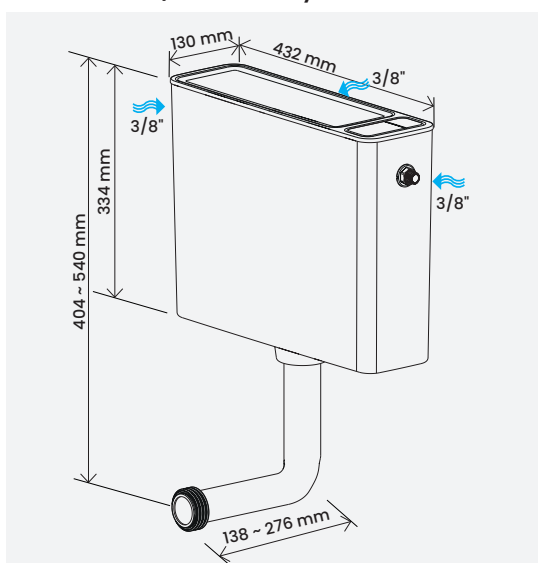

1/2" bottom-entry version

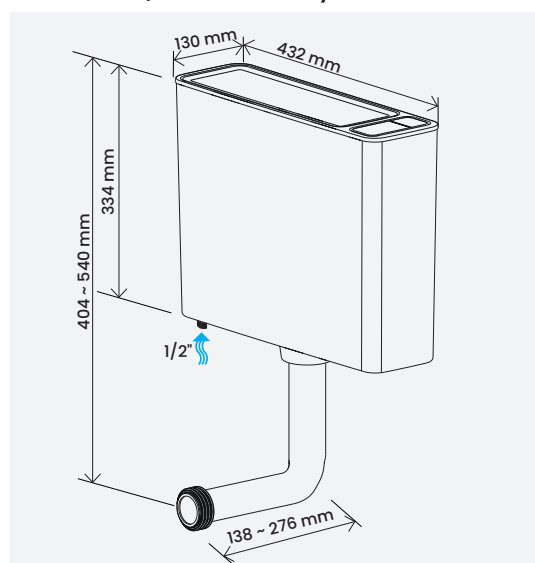

**START
STOP**
SF

DF

CE
EN 14055
Classe 1



EXPOSED CISTERNS LOW LEVEL



Riviera SF



Primo 28



Riviera DF




LOW LEVEL INSTALLATION

SINGLE FLUSH



- Ø40/40 mm bend pipe
- **Bright chrome button**
- Maximum water volume capacity 9l
- **Quiet fill inlet valve Brio 751**
- HDPE bend pipe ø 40/40 mm included

- **Quiet**
- Single flush outlet valve, 6L factory preset
- Side lever actionning
- Maximum capacity tank of 9L
- **Quiet fill valve Compact 95L NF**

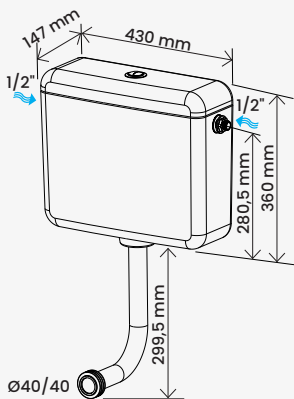

DUAL FLUSH

- Ø40/40 mm bend pipe
- **Bright chrome button**
- Maximum water volume capacity 9l
- **Quiet fill inlet valve Brio 751**
- HDPE bend pipe

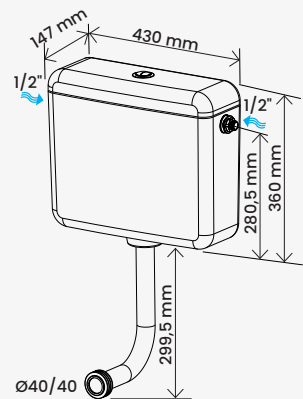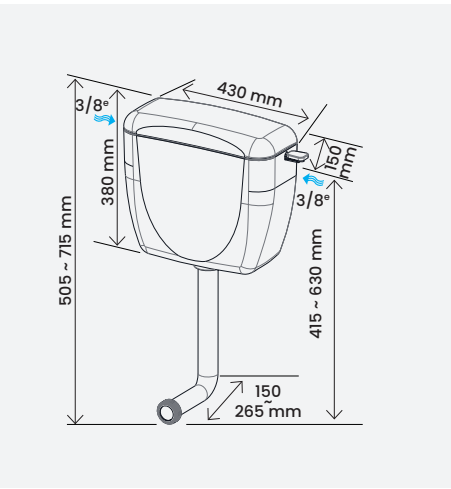

EXPOSED CISTERNS HIGH LEVEL



Primo 08



Rondo H pneumatic SF



Rondo H pneumatic DF




HIGH LEVEL INSTALLATION

SINGLE FLUSH

DUAL FLUSH


• Chain flush

- **Powerful flush**
- **Equipment out of the reach of the user**
- For floor standing or squatting WC
- Single flush 6l top side lever command with pull chain
- Maximum water volume capacity 9l
- **Quiet fill inlet valve Brio 751**
- To be ordered separately: bowl supply pipe (cf accessories)

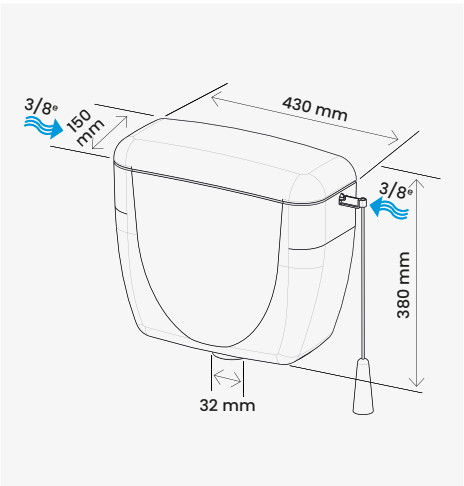


• Remote command

- Reversible for dry risers' installation
- For floor standing, suspended or squatting WC
- **Single flush 6l offset pneumatic actuation**
- **2 metres air hose with corrugated pipe protection**
- Maximum water volume capacity 9l
- **Insulated to prevent condensation**
- **Quiet fill inlet valve Compact 95L NFP**
- To be ordered separately: bowl supply pipe and pneumatic button

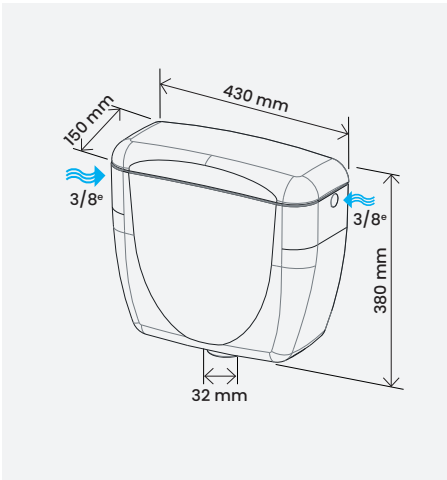

- Reversible for dry risers' installation
- For floor standing, suspended or squatting WC
- **Dual flush 3/6l offset pneumatic actuation**
- **2 metres air hose with corrugated pipe protection**
- Maximum water volume capacity 9l
- **Insulated to prevent condensation**
- **Quiet fill inlet valve Compact 95L NFP**
- To be ordered separately: bowl supply pipe and pneumatic button

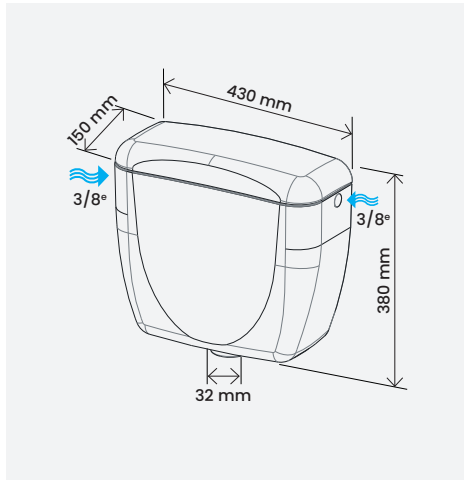

EXPOSED CISTERNS CLOSE-COUPLED

Primo 58





Rondo Comfort SF



CLOSE-COUPLED INSTALLATION

SINGLE FLUSH

- | | |
|--|---|
| <ul style="list-style-type: none">• Quiet <ul style="list-style-type: none">• Single flush outlet valve, 6L factory preset• Side lever actioning• Maximum capacity tank of 9L• Quiet fill valve | <ul style="list-style-type: none">• Start & stop• Easy cleaning = Button integrated into the cistern <ul style="list-style-type: none">• Single flush 6L • Maximum water volume capacity 9l• Insulated to prevent condensation• Rear support and stabiliser• Quiet fill inlet valve Compact 95L  |
|--|---|

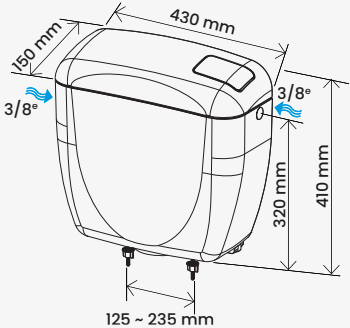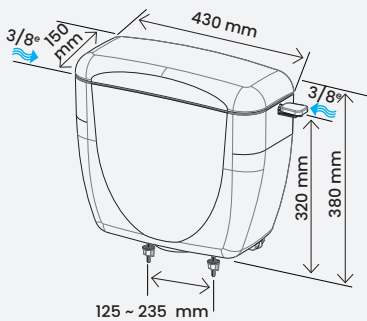

EXPOSED CISTERNS CLOSE-COUPLED

Rondo Comfort DF



Scala Comfort



Scala Comfort Plus




CLOSE-COUPLED INSTALLATION

DUAL FLUSH


• Easy cleaning = Button integrated into the cistern

- Dual flush 3/6l
- Maximum water volume capacity 9l
- Insulated to prevent condensation
- Rear support and stabiliser
- Quiet fill inlet valve Compact 95L 

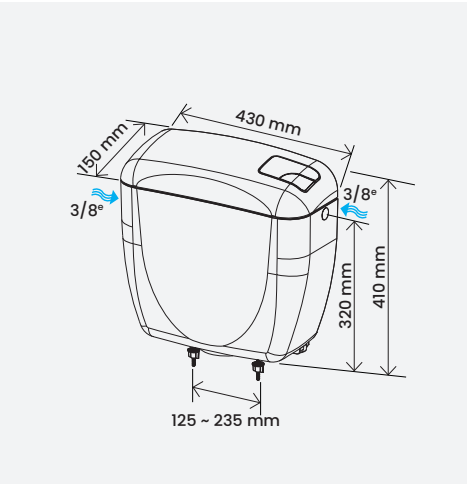


• Smart push button

- Bright chrome button
- Dual flush 3/6l
- Maximum water volume capacity 9l
- Insulated to prevent condensation
- Rear support and stabiliser
- Quiet fill valve Compact 95L

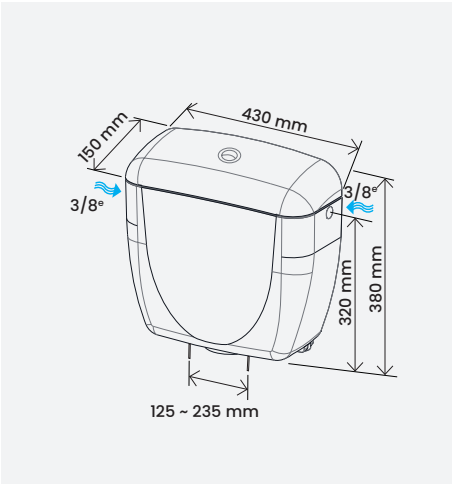

• Ultra quiet & water saving

- Ultra quiet: 10 dB only
- Delayed action: water saving
- Bright chrome button
- Dual flush 3/6l
- Maximum water volume capacity 9l
- Insulated to prevent condensation
- Rear support and stabiliser
- Ultra quiet 10 dB water saving delayed action inlet valve QUIETO OD 

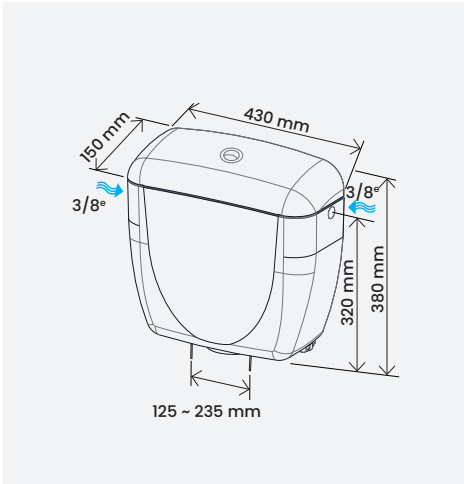

10 dB

ACCESSORIES FOR CLOSE-COUPLED CISTERNS

UNIVERSAL WATER SUPPLY SET

Flexible for a side or bottom, left or right water supply connection

Also compatible with our low level and high level cisterns



REAR SUPPORT

- To create a support between the rear of the cistern and the wall to avoid pivoting effects
- Adjustment of 60mm



LOW LEVEL TRANSFORMATION SET

- To switch from a close-coupled to a low level cistern
- Height adjustable supply pipe



STABILISER

To reinforce the holding of the cistern on bowls with a particular geometry



ACCESSORIES FOR HIGH LEVEL CISTERNS



TCD 32

TCC 32

CR 32

TCC 32

Flush bend pipe $\varnothing$ 32 mm for floor standing or squatting WC, delivered in 2 segments, total length 1,80 m, horizontal section, length 230 mm

TCD 32

Flush straight pipe $\varnothing$ 32 mm for squatting WC, delivered in 2 segments, total length 1,95 m

CR 32

Rubber cone, $\varnothing$ 32 mm pipe connection

QC 32

Spray, $\varnothing$ 32 mm pipe connection

Non contractual pictures. Products can be modified without any announcement.

PACKING INFORMATION

Standard quantity of product per carton

Model	Packing	Packing		Pallet			MOQ
		N# of sales units	Length x height x width (mm)	Width x depth (mm)	N# of master boxes	N# of sales units	
Rondo Confort SF	Box	3	470 x 460 x 540	1000 x 1200	30	90	3
Rondo Confort DF	Box	3	470 x 460 x 540	1000 x 1200	30	90	3
Scala Confort Plus	Box	3	450 x 440 x 550	1000 x 1200	30	90	3
Riviera	Box	3	475 x 415 x 505	1000 x 1200	16	48	3
Primo 08	Box	3	450 x 440 x 550	1000 x 1200	30	90	3
Rondo H pneumatic	Box	3	450 x 440 x 550	1000 x 1200	30	90	3
Tosca SF	Box	1	440 x 370 x 145	1000 x 1200	90	90	1
Tosca DF	Box	1	440 x 370 x 145	1000 x 1200	90	90	1

CODES INFORMATION

Exposed cisterns		
Model	Code	P.
EC TOSCA SF WHITE/ANTHRACITE SIDE ENTRY LOW LEVEL	10008008	65
EC TOSCA DF WHITE/ANTHRACITE SIDE ENTRY LOW LEVEL	10008013	65
EC TOSCA SF WHITE/BLACK SIDE ENTRY LOW LEVEL	10013673	65
EC TOSCA DF WHITE/BLACK SIDE ENTRY LOW LEVEL	10013676	65
EC TOSCA SF BLACK/WHITE SIDE ENTRY LOW LEVEL	10013830	65
EC TOSCA DF BLACK/WHITE SIDE ENTRY LOW LEVEL	10013831	65
EC TOSCA SF FULL WHITE SIDE ENTRY LOW LEVEL	10013872	65
EC TOSCA DF FULL WHITE SIDE ENTRY LOW LEVEL	10013873	65
EC TOSCA SF FULL BLACK SIDE ENTRY LOW LEVEL	10013874	65
EC TOSCA DF FULL BLACK SIDE ENTRY LOW LEVEL	10013875	65
EC TOSCA SF WHITE/ANTHRACITE BOTTOM ENTRY LOW LEVEL	10016181	65
EC TOSCA DF WHITE/ANTHRACITE BOTTOM ENTRY LOW LEVEL	10016182	65
EC TOSCA SF WHITE/BLACK BOTTOM ENTRY LOW LEVEL	10016183	65
EC TOSCA DF WHITE/BLACK BOTTOM ENTRY LOW LEVEL	10016184	65
EC TOSCA SF BLACK/WHITE BOTTOM ENTRY LOW LEVEL	10016185	65
EC TOSCA DF BLACK/WHITE BOTTOM ENTRY LOW LEVEL	10016186	65
EC TOSCA SF FULL WHITE BOTTOM ENTRY LOW LEVEL	10016187	65
EC TOSCA DF FULL WHITE BOTTOM ENTRY LOW LEVEL	10016188	65

Exposed cisterns		
Model	Code	P.
EC TOSCA SF FULL BLACK BOTTOM ENTRY LOW LEVEL	10016189	65
EC TOSCA DF FULL BLACK BOTTOM ENTRY LOW LEVEL	10016190	65
EC SCALA COMFORT PLUS SIDE ENTRY DOUBLE FLUSH CLOSE COUPLED	10002107	69
REAR SUPPORT AND STABILISER SET	10007354	70
EC PRIMO 08 PULL CHAIN SIDE ENTRY SINGLE FLUSH HIGH LEVEL	31080618	67
EC RONDO COMFORT SIDE ENTRY DOUBLE FLUSH CLOSE COUPLED	31501010	69
EC RONDO COMFORT SIDE ENTRY SINGLE FLUSH CLOSE COUPLED	31505010	67
EC RONDO PNEUMATIC SIDE ENTRY HIGH LEVEL	31509110	67
LOW LEVEL TRANSFORMATION SET	31520010	70
UNIVERSAL WATER SUPPLY SET	31520110	70
EC PRIMO 58 PAD SIDE ENTRY SINGLE FLUSH CLOSE COUPLED	31580618	68
Flush bend pipe ø 32 mm	34086401	70
Flush straight pipe ø 32 mm	34086510	70
Rubber cone, ø 32 mm	34086801	70
EC RIVIERA SIDE ENTRY SINGLE FLUSH LOW LEVEL	10001647	66
EC RIVIERA SIDE ENTRY DOUBLE FLUSH LOW LEVEL	10001648	66
EC PRIMO 28 PAD SIDE ENTRY SINGLE FLUSH LOW LEVEL	31280610	66
EC SCALA COMFORT SIDE ENTRY DOUBLE FLUSH CLOSE COUPLED	31402016	69

